QUICK USER GUIDE

Wall-mounted charger

EV WALLBOX

Model: BS 20

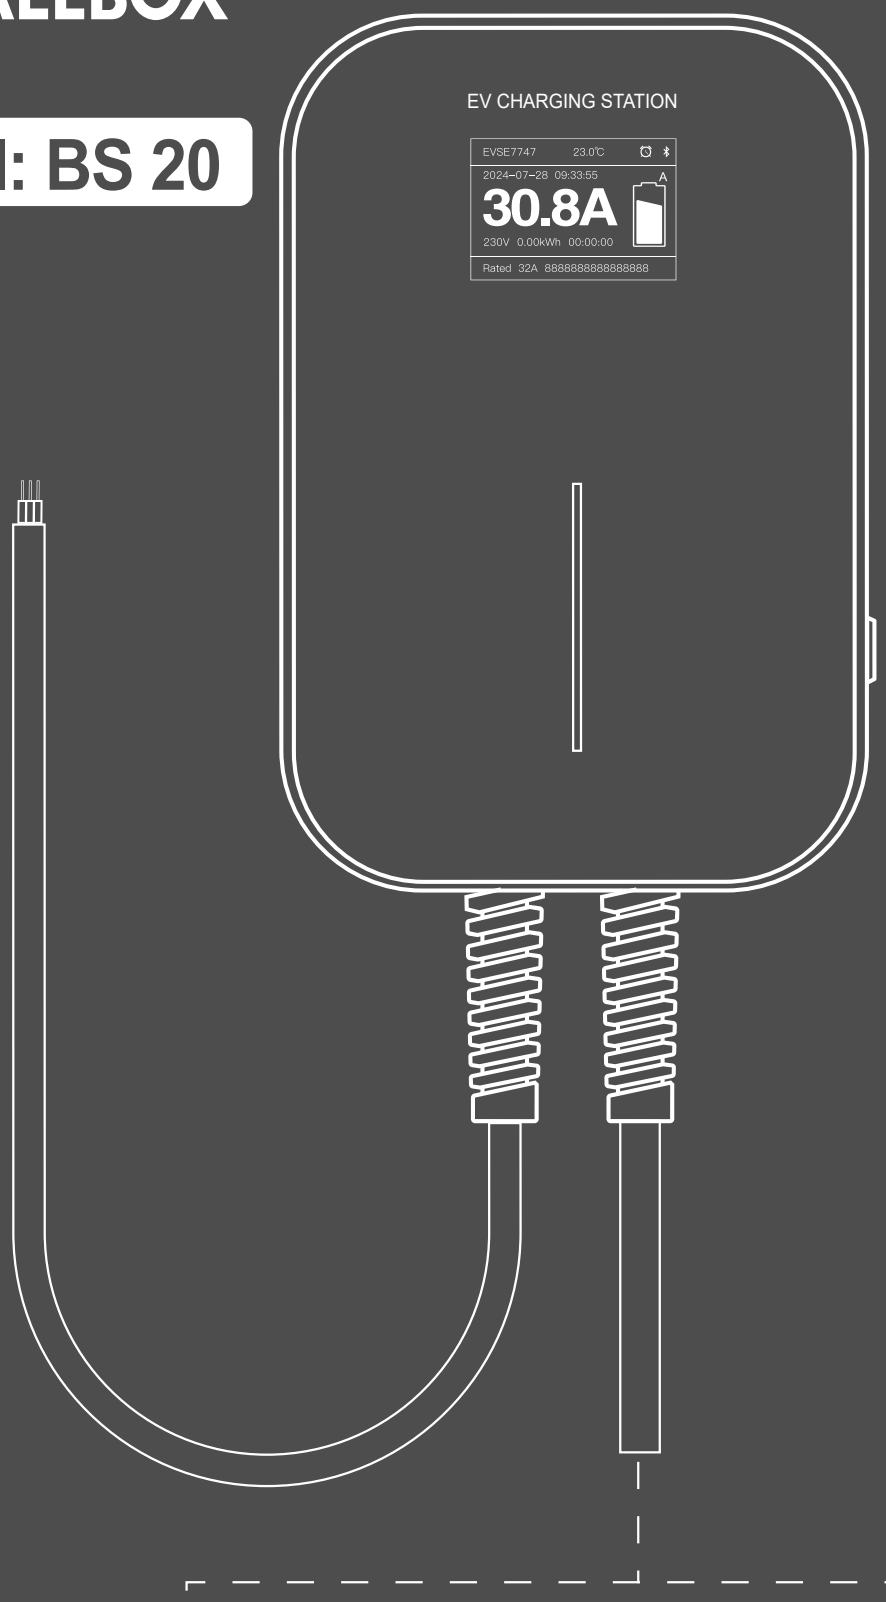

APP

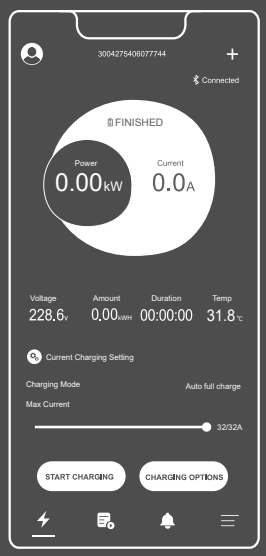

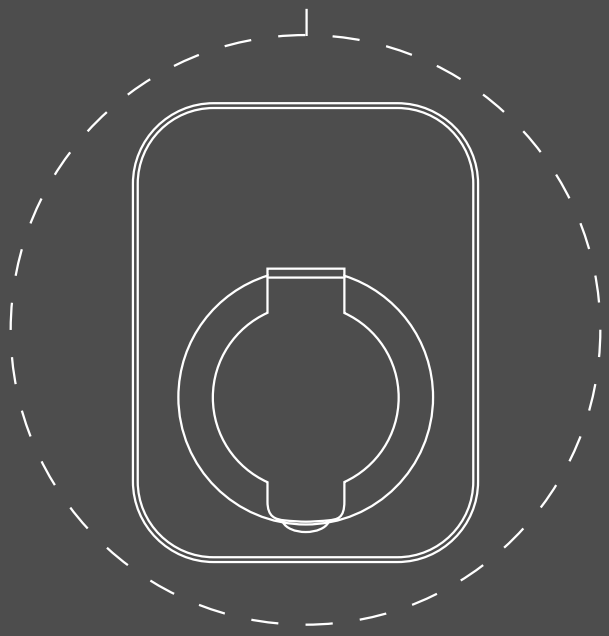

(MODE A - WITH SOCEKT)

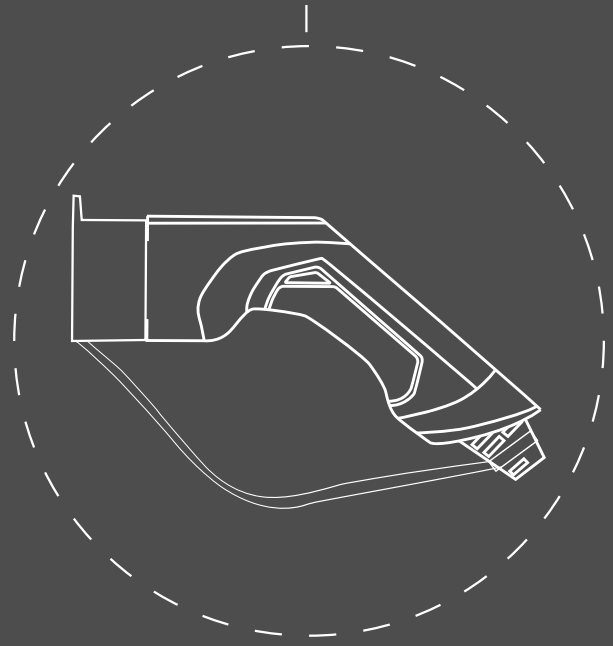

(MODE C - WITH CABLE)

DOWNLOAD AND CONNECT

iOS

Please search for 'EVSEMaster' on App Store.

Android

Please search for 'EVSEMaster' on Google Play.

Guide to turn on the Bluetooth page

When searching for charging stations, if Bluetooth is not turned on, it will prompt to turn on Bluetooth:

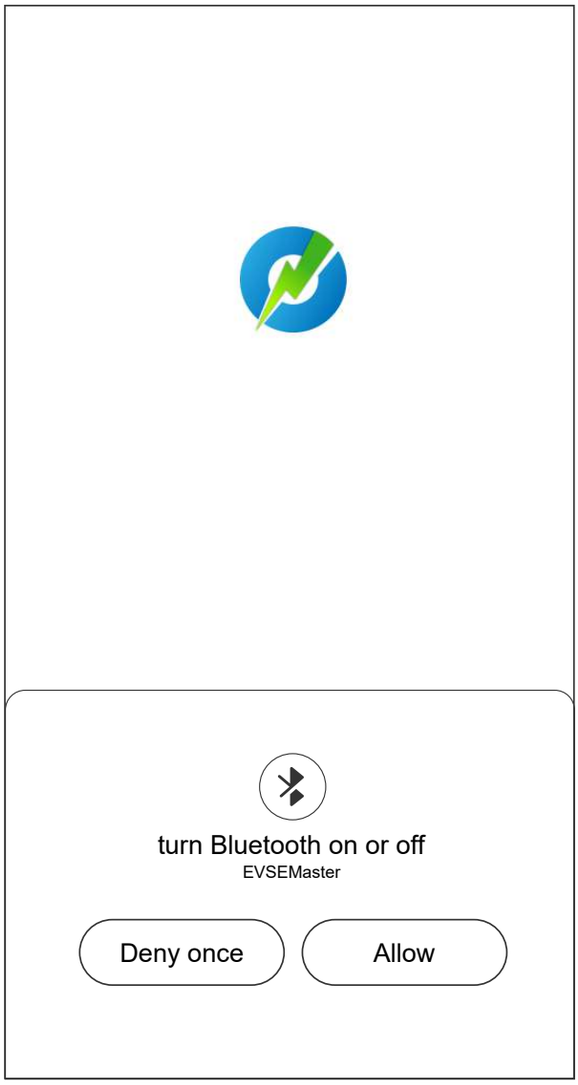

Guide to turn on the location page

When searching for the charging station, if the location service is not turned on, it will prompt to turn on location access:

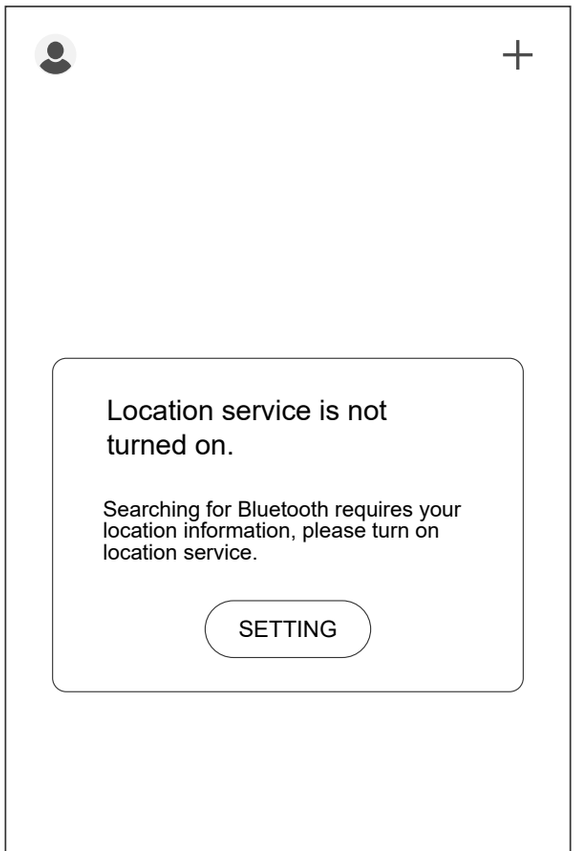

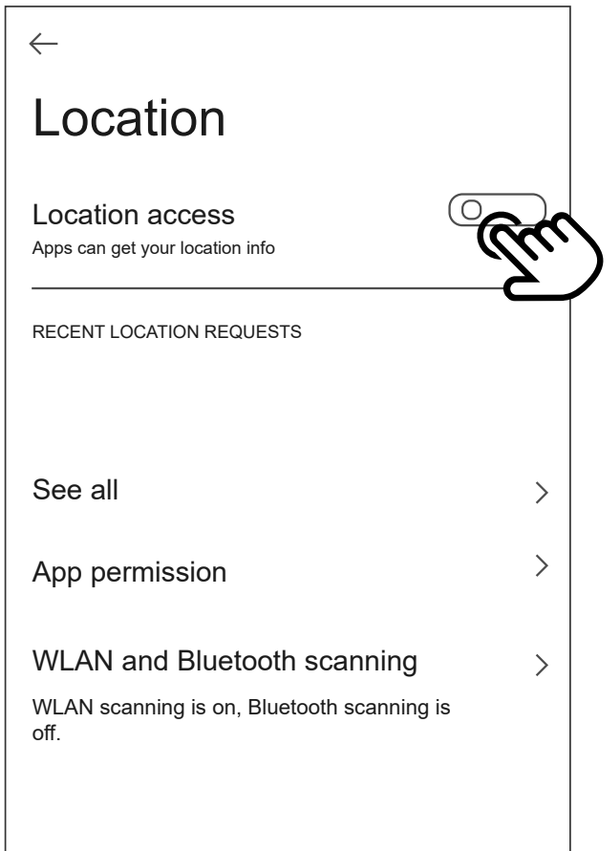

First connection

Bluetooth must be used for the first connection.

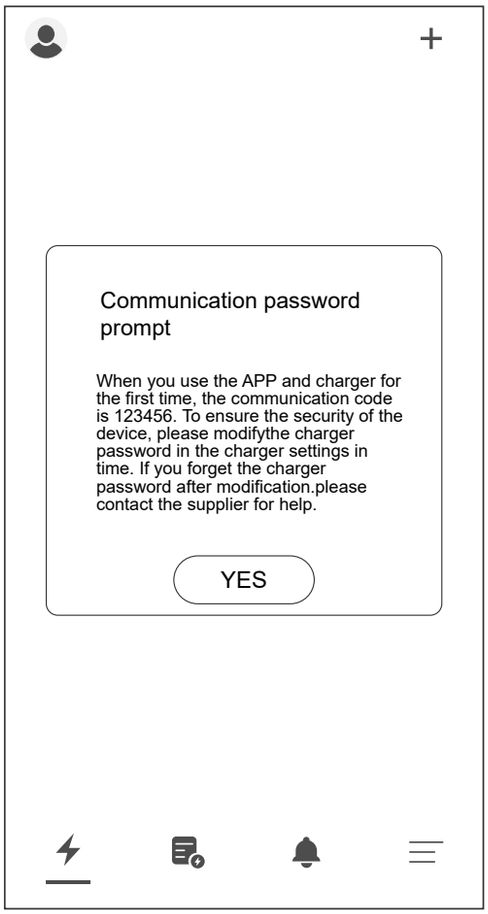

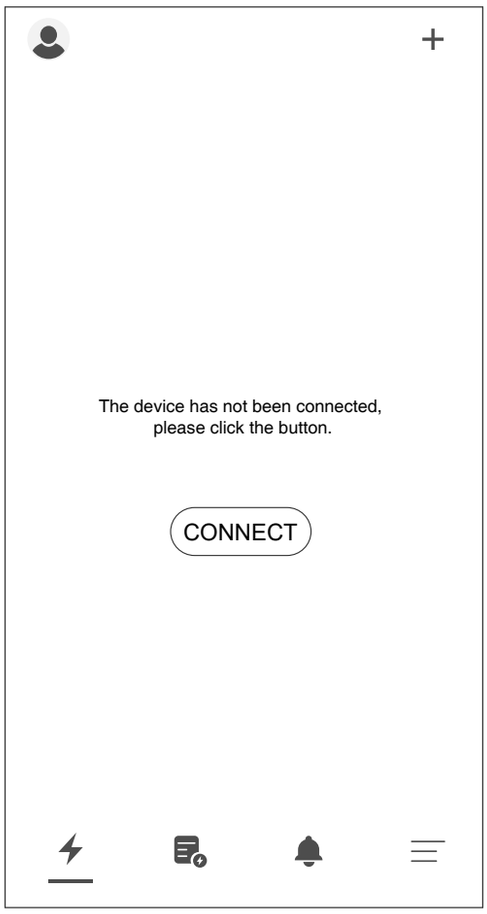

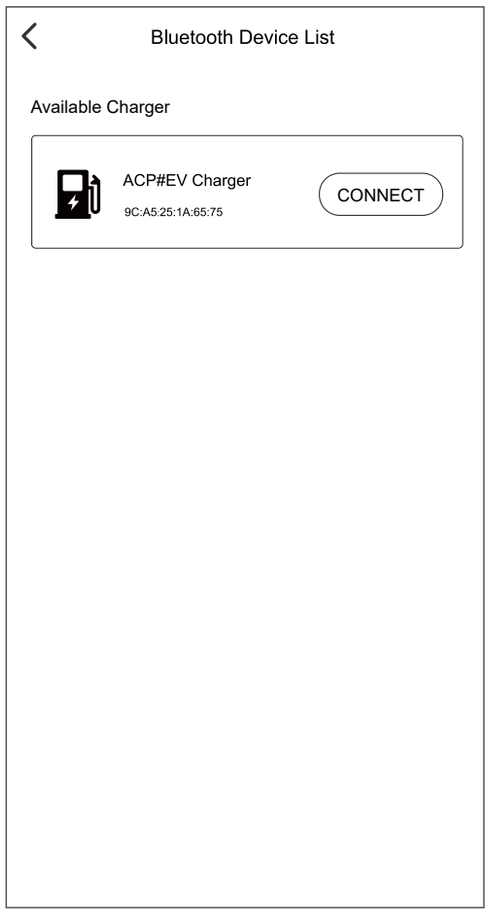

Customized charging-Single charging

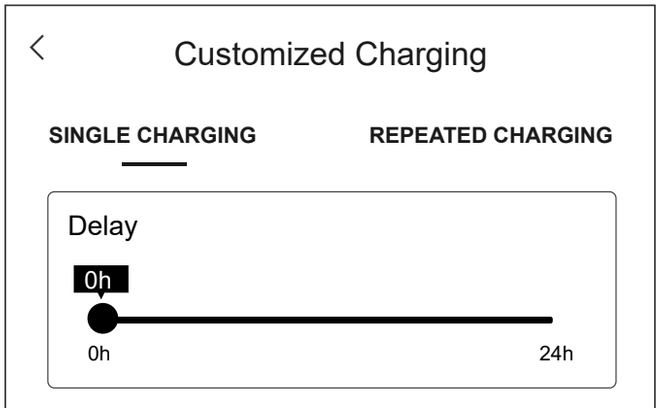

There are three parameters that can be set for a customized single charging.

1. Delayed charging: Schedule the charging start time.Maximum is 24 hours later.

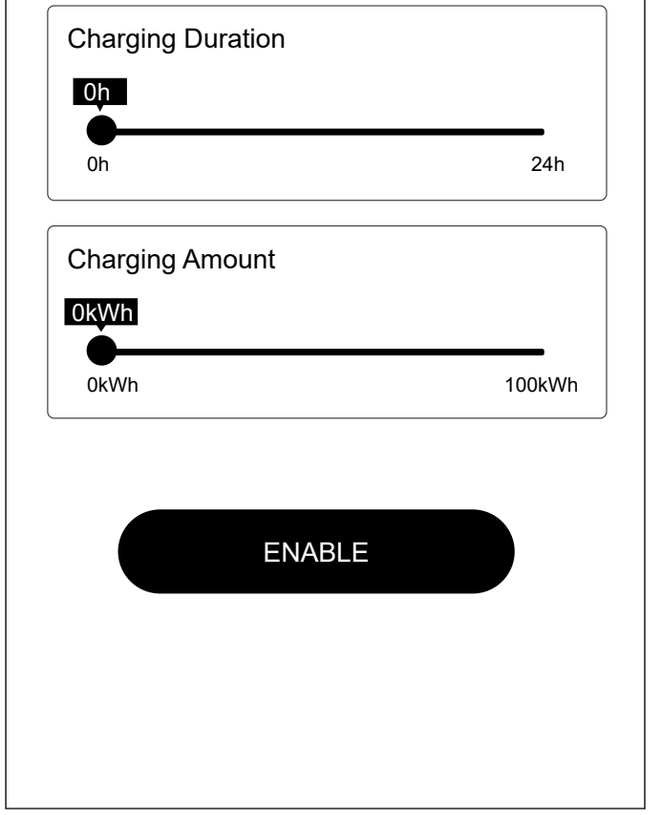

2. Charging duration: Set the maximum charging duration, after which the charging station will automatically stop charging.

3. Charging amount: Set the maximum charging amount, beyond which the charging station will automatically stop charging.

Customized charging- Repeated charging

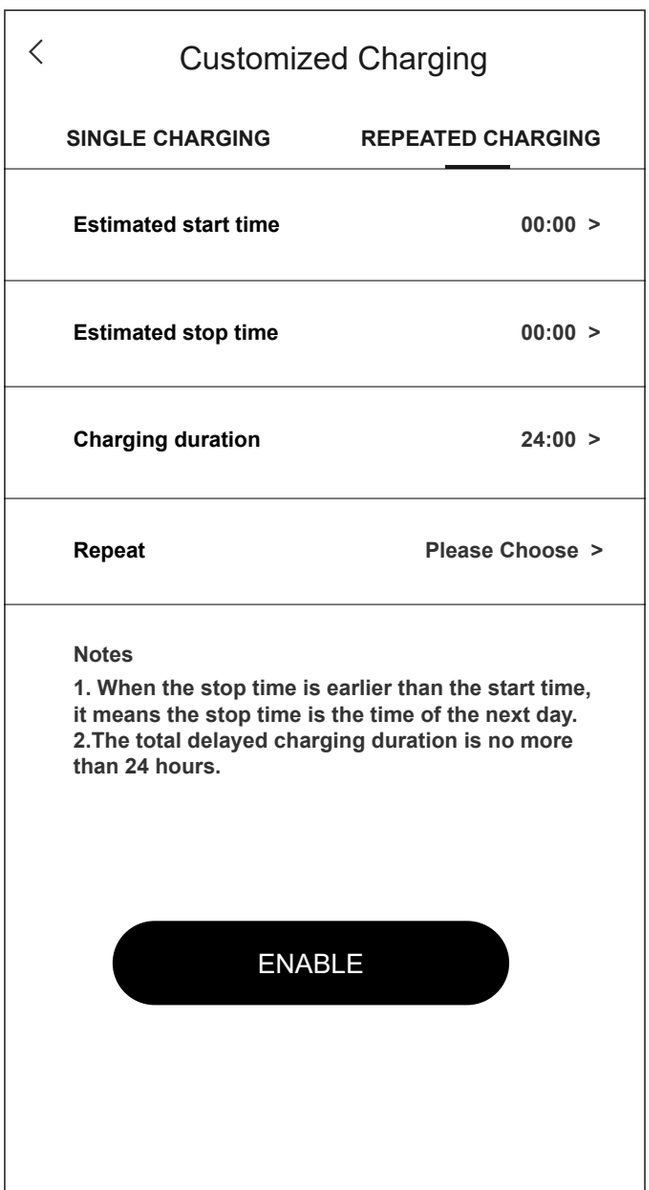

There are four parameters that can be set for customized charging.

1. Cycle start time: Set the time at which to start charging.

2. Cycle stop time: Set the time at which to stop charging.

3. Charging duration: Set the maximum charging duration, after which the charging station will automatically stop charging.

4. Cycle repetition time: Set the days of the surrounding cycle to repeat, and you can select part or all of it.

User settings

The user settings page contains Nickname, Language settings, FAQ and About.

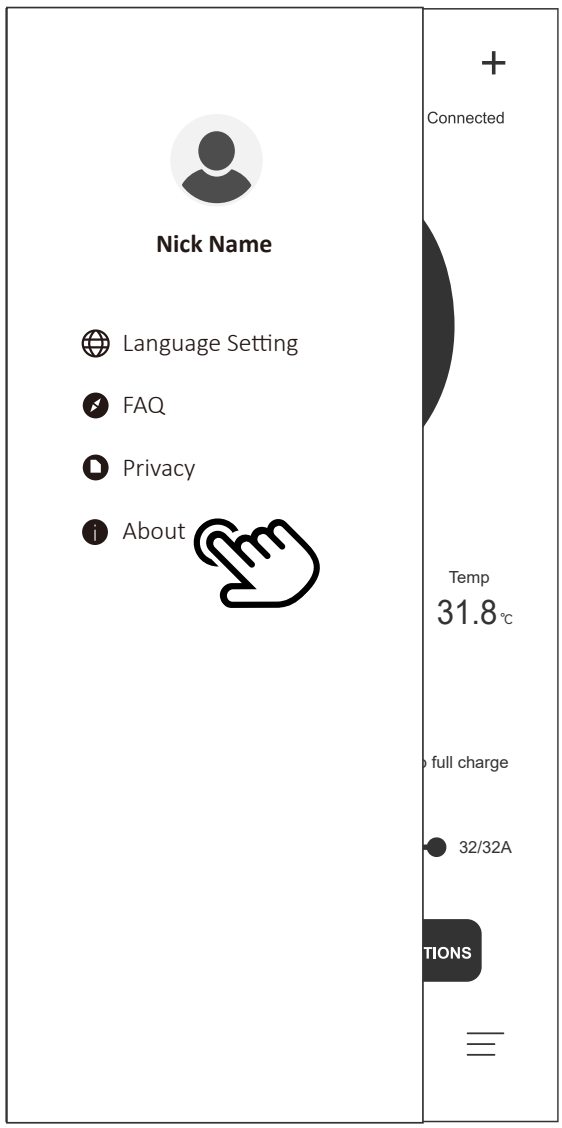

Charging records-My records

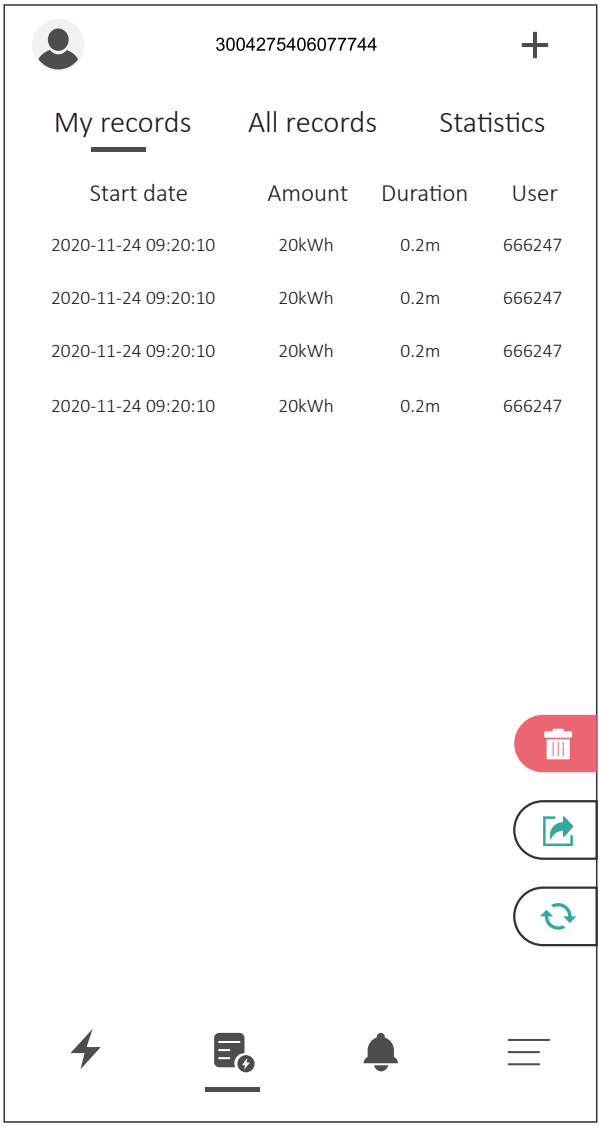

1. My records
Only the charging records of the user of this APP are counted.

2. All records
All the charging records in the charging station are counted.

3. Charging statistics
The charging duration and the charging amount can be counted monthly and daily, and displayed in a bar graph.

4. The record with a delete button
The record stored in the mobile APP will be deleted, while the record of the charging station will not be deleted.

5. Record synchronize button
When the mobile phone needs to synchronize the record of the charging station, you can press this button for the synchronization, which will take a certain amount of time.

6. Record derive button
Records will be generated into a file which can be derived to other softwares through sharing.

APP FUNCTION INTRODUCTION

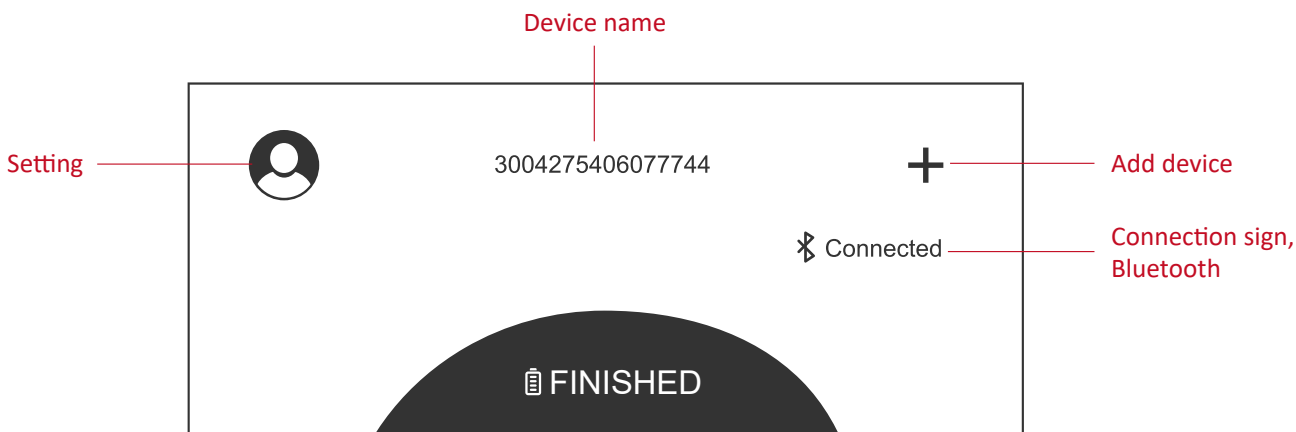

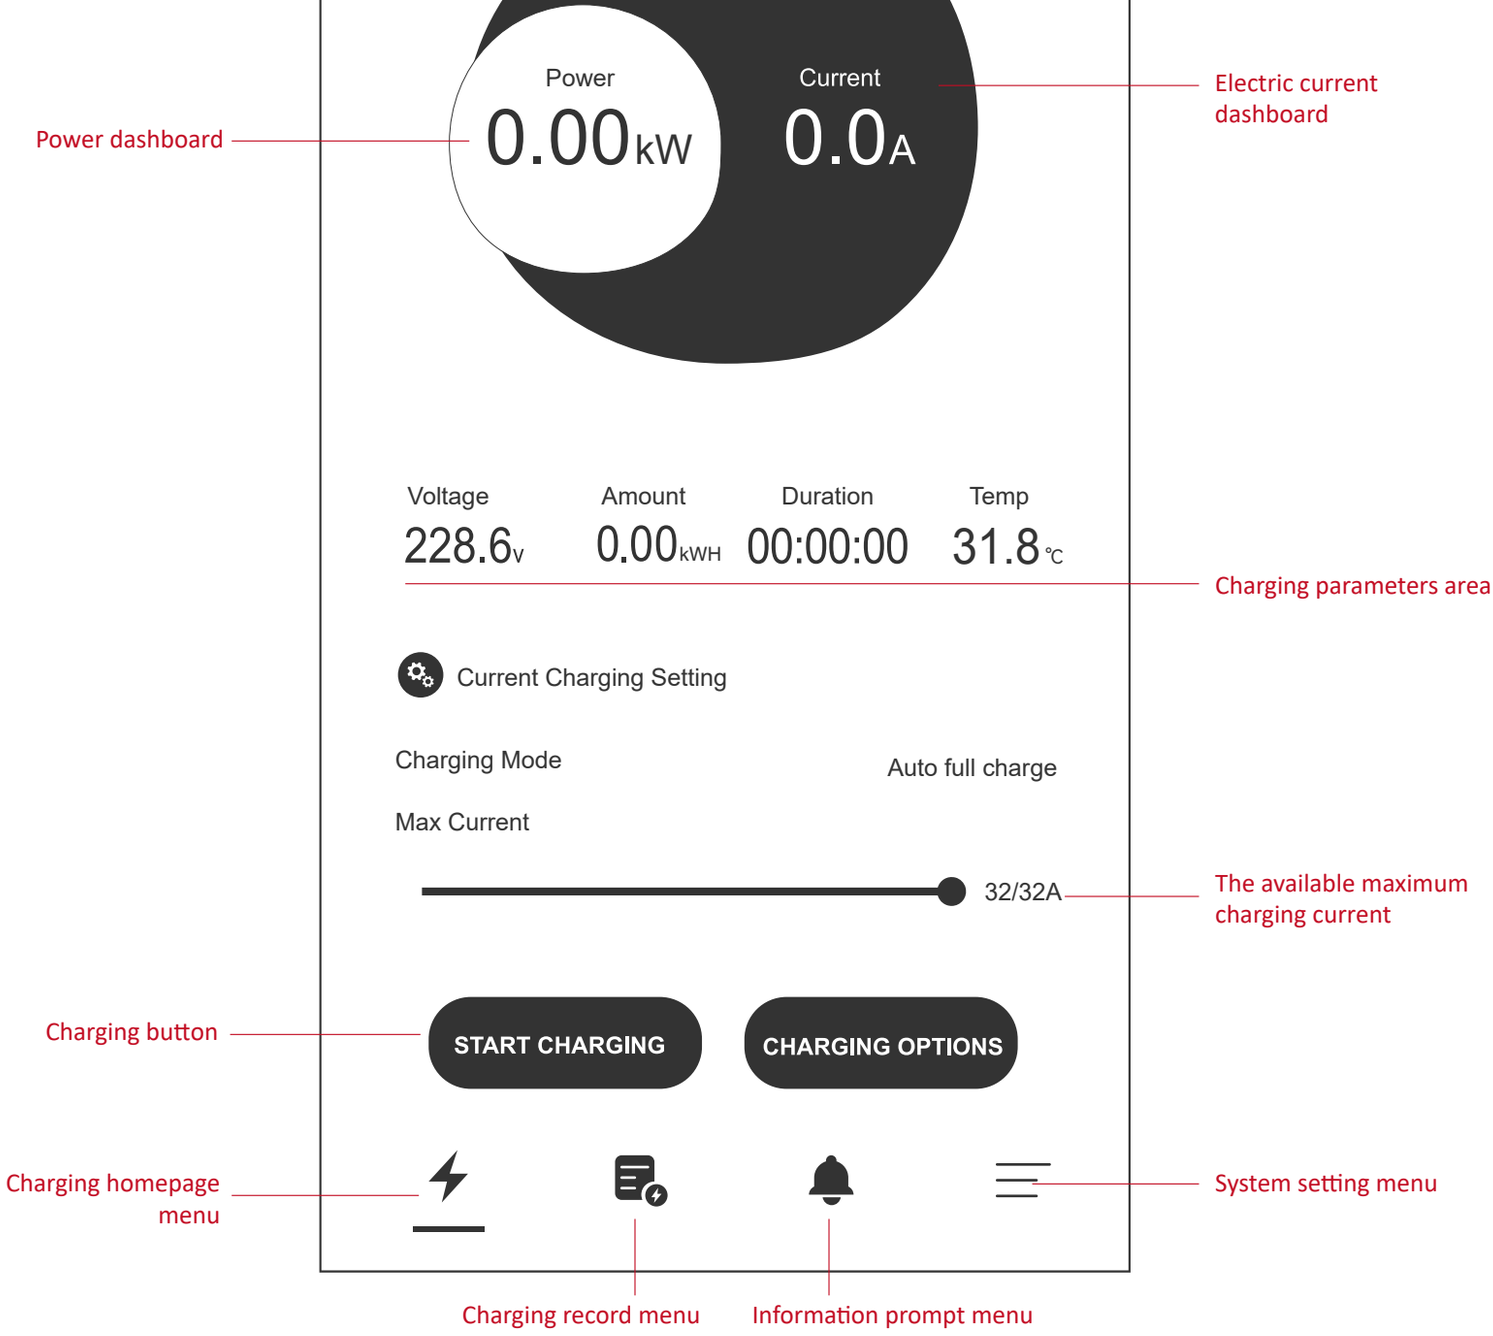

The charging parameter settings can be saved in the APP, and the set data will be automatically used for each charging parameter.

The main three charging parameter settings include:
1. Set delayed charging
2. Set the charging duration
3. Set the maximum charging current

INSTRUCTION FOR USE
(MODE A - WITH SOCEKT)

1

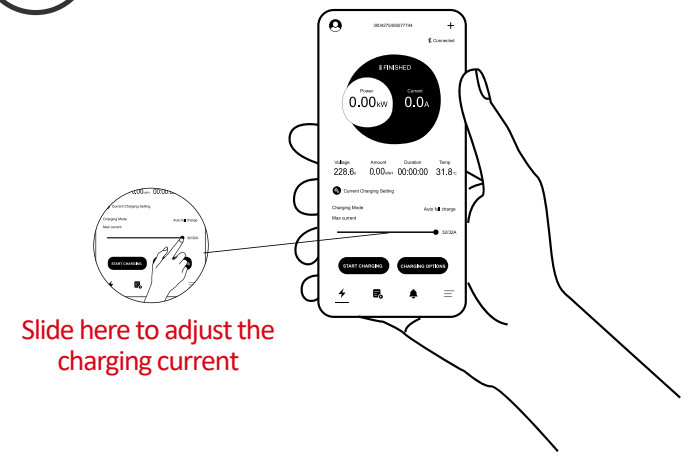

Set the charging current on the APP

2

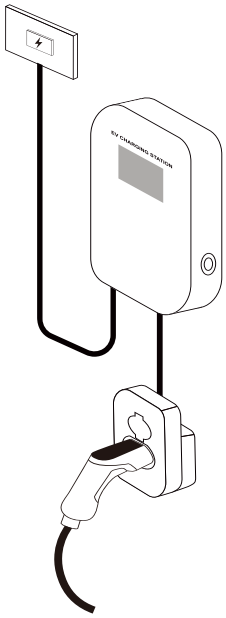

Insert the plug into the socket

3

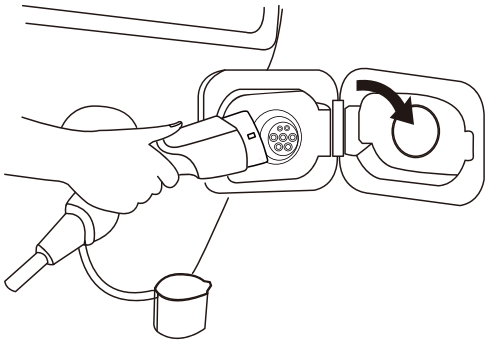

Connect the charging gun

4

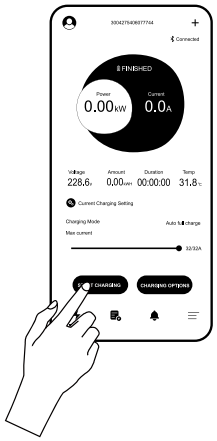

Start charging using the APP

5

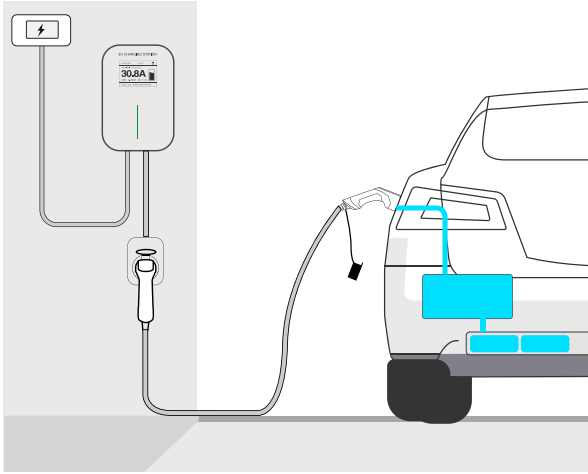

Enjoy the charging!

INSTRUCTION FOR USE
(MODE C - WITH CABLE)

1

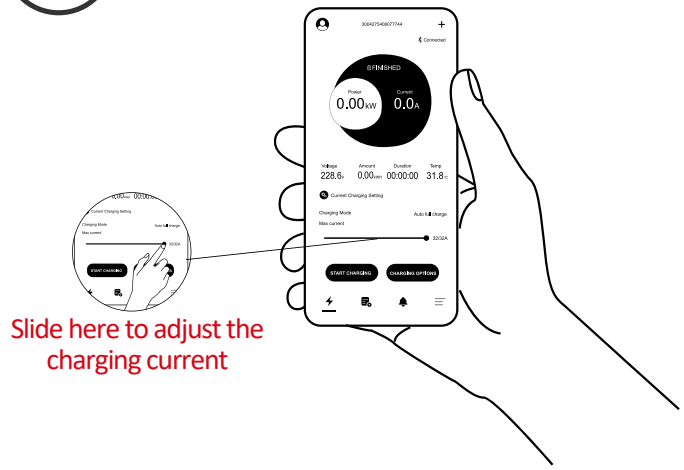

Set the charging current on the APP

2

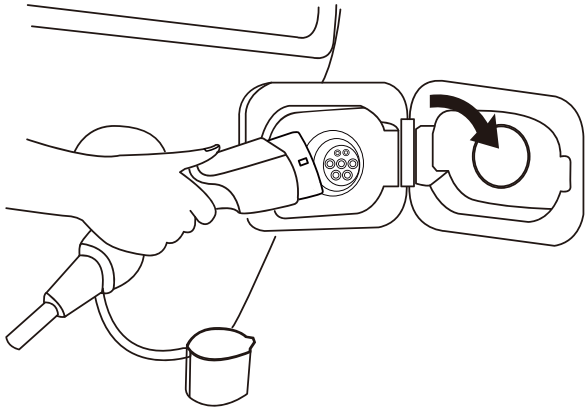

Connect the EV and the wallbox with the EV charging cable

3

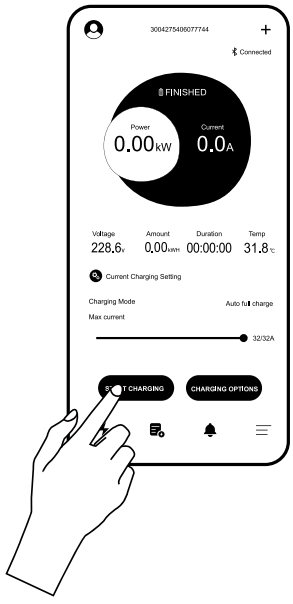

Start charging using the APP

4

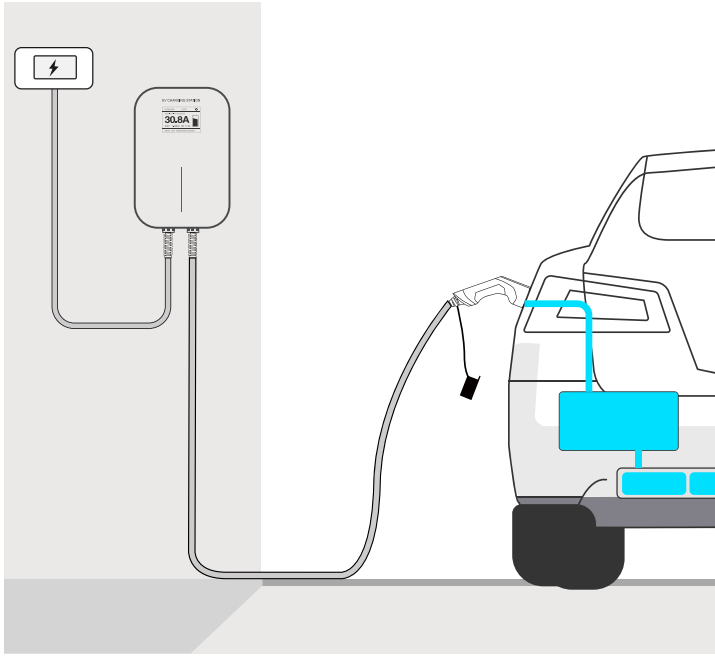

Enjoy the charging!

ILLUSTRATION OF SCREEN

SINGLE PHASE

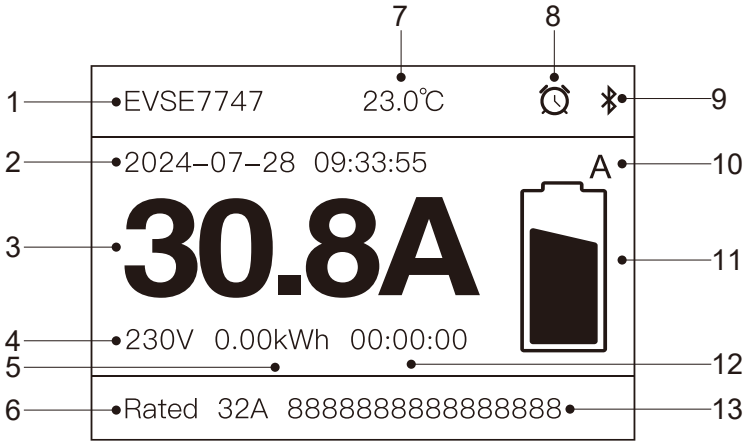

1. Charger name
2. Real-time date
3. Charging current
4. Real-time voltage
5. Charging amount
6. Rated current
7. Working temperature
8. Charger reservation function (on)
9. Bluetooth connection icon
10. APP control
11. Charging icon
12. Charging duration
13. Devcie number

THREE PHASE

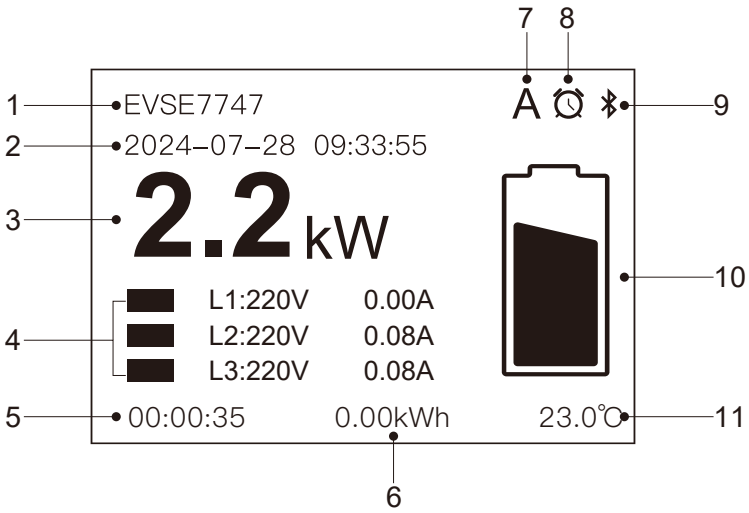

1. Charger name
2. Real-time date
3. Charging power
4. Voltage and current of each phase
5. Charging duration
6. Charging amount
7. APP control
8. Charger reservation function (on)
9. Bluetooth connection icon
10. Charging icon
11. Working temperature

FAILURE DESCRIPTION

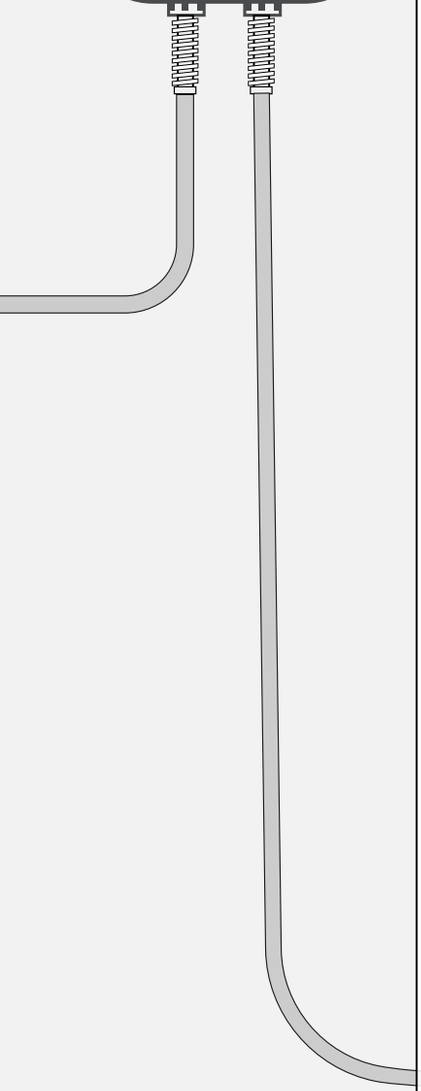

1. Check whether there are any foreign objects or water in the charging plug or vehicle socket.
2. Unplug and reconnect. If the fault persists, please check the entire charging circuit before trying again.
If the problem remains after multiple attempts, please stop using the charger and contact the after-sales personnel.

1. Check the selected power. Try again with higher current and restart.
2. If the above operation does not work, try to charge your vehicle with another AC charger. If your vehicle works well, please stop using the charger and contact the after-sales personnel.

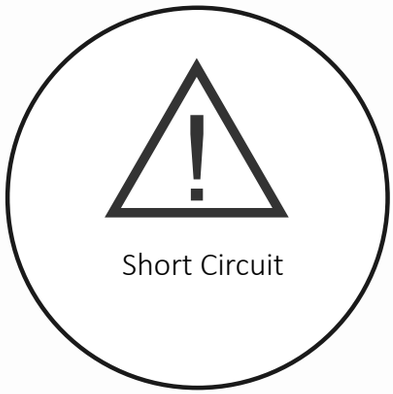

Short Circuit

1. Check the selected power. Try again with higher current and restart.
2. If the above operation does not work, try to charge your vehicle with another AC charger. If your vehicle works well, please stop using the charger and contact the after-sales personnel.

Over Temperature

1. The current ambient temperature is too high, so the charger stops to keep you safe.
2. Charging will restart automatically when the temperature returns to an appropriate range.

CP Error

Communication error between the vehicle and charger has occurred.
1. Unplug and reconnect. Make sure the plug is completely inserted.
2. If the above operation does not work, try to charge your vehicle with another AC charger.If your vehicle works well, please stop using the charger and contact the after-sales personnel.

SECURITY WARNING

⚠ ATTENTION

Non-compliance with the operating instructions can cause serious consequences.
Manufacturer does not assume any liability for damage caused by disregarding operating instructions or other warnings marked on the device.
High voltage could result in fire hazards ! Never use the device if the housing is damaged or opened!
This product is not suitable for people with limited mobility, sensory or psychological disabilities, and those who lack use experience or a certain degree of knowledge.

⚠ IMPORTANT SAFETY INSTRUCTIONS WARNING!

▲This product should only be installed, repaired or maintained by authorized electricians and in accordance with national guidelines for electrical installations. All applicable local, regional and national regulations for electrical installations must be respected.

▲Regularly check the charger for visible damage. Do not use a damaged product.

▲Make sure that all safety facilities and connections are available, properly installed and undamaged at all times and are tested regularly to ensure they can operate normally.

▲Make sure that the input voltage, frequency, circuit breakers and other conditions of the device meet the specifications before the device is powered on. It's important to observe the maximum permissible charging current of the connection.

▲Before powering on the device, please confirm that the device is properly grounded to avoid unnecessary accidents. If a ground fault occurs, it is assumed that the cable carries voltage. Please make sure there is no high-voltage power in the system before inspecting the device.

▲Please insulate the unnecessarily exposed metal parts of all tools to prevent them from touching the metal frame, which may cause short circuit.

▲To ensure the service life and stable operation of the charging station, the operating environment should be kept as clean as possible with a relatively stable temperature and humidity. The charging station must not be used in flammable environment or environments with volatile gas.

▲Please keep the power cord away from the heated surface. Please do not put the power cord in the gap of the closed door or pull it out of sharp edges or corners.

▲Do not use the charger when the inside of the charging plug is wet.

▲Do not modify, retrofit, or change any part by yourself under any circumstances.

▲Please do not use this product as a toy. Ensure that children are supervised to prevent them from using this device as a toy or inserting their fingers into the charging connector while the power plug is still connected.

▲The circuit to which the charger is to be connected must be equipped with a residual current circuit breaker.

⚠ Note

Please do not use it for other purposes except electric car charging.
Do not try to disassemble the device by yourself under any circumstances. Otherwise, the internal precision parts may be damaged, and you will not be able to apply for after-sales service.